

## Solar Galaxy

### 585–600 Watt MONO-FACIAL MODULE

- IEC61215: 2021
- IEC61730: 2016
- TUV Rheinland Standard
- Lloyd'S Ariel Re  
Solar Performance Insurance
- ISO9001: 2015  
Quality Management System
- ISO14001:  
Environmental Management System
- CE: Europe Standard
- Inmetro Certificate
- Japan JP-AC

#### KEY FEATURES




**12BB Cell**  
More uniform current collection capability, reducing the current heat loss of the internal cells.



**Higher Output Power**  
The output power of 120 half-cells Monocrystalline modules is up to 600W.



**Harsh Environmental Adaptability**  
Strict salt spray and ammonia corrosion test by the third party.

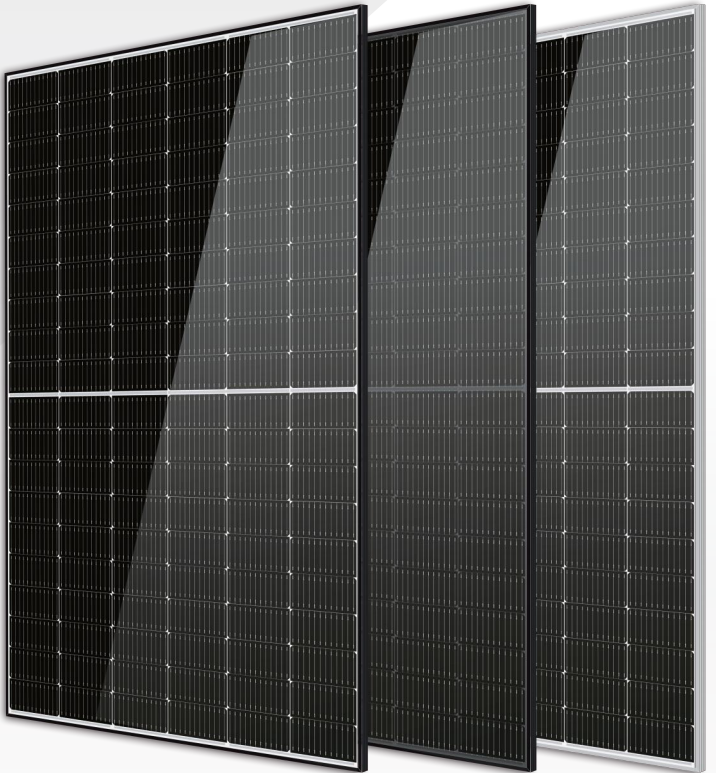


**Low Light Features**  
Higher performance under low light environment.



**PID Protection**  
Ensure the attenuation probability caused by PID phenomenon is minimized.



**Load Capacity**  
Mechanical load tests including wind load 2400 Pa and snow load 5400 Pa.

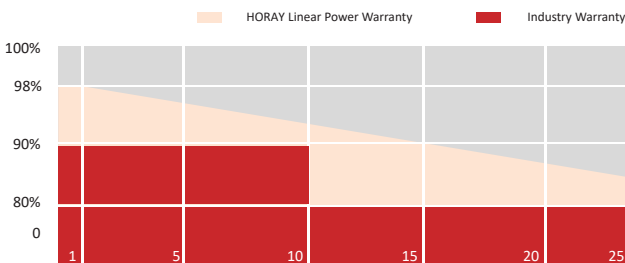


HEADQUARTER: HORAY SOLAR CO., LTD.

GLOBAL MARKETING AND SERVICE: HORAY SOLAR GMBH

✉ sales@horaysolar.com 🌐 www.horaysolar.com ☎ +86-510 83580688  
📍 NO.30-5, East Yanxin Road, Huishan District, Wuxi 214177 Jiangsu P.R China

✉ info@horaysolar.com 🌐 www.horaysolar.com  
📍 Lurgiallee 10-12 Frankfurt am Main 60439 Germany

## MECHANICAL DIAGRAMS

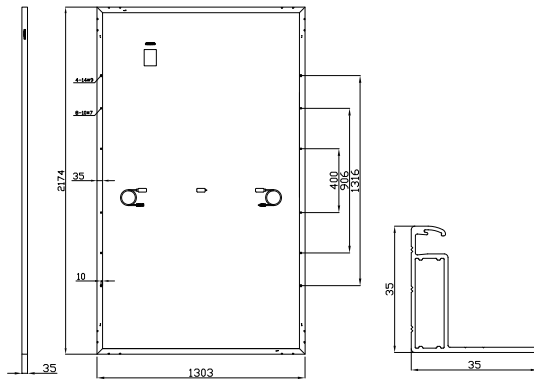

## SPECIFICATIONS

Weight	31kg
Dimension	2174mm*1303mm*35mm
Cell Dimension	210*105mm
Cell Amount	60*2 pcs
Maximum System Voltage	1500V
Junction Box	IP68
Frame	Aluminum Alloy
Cable	4mm <sup>2</sup> ,+300,-300mm/±1300mm Length can be customized
Connector	MC4 compatible
Application Level	Class A

## ELECTRICAL PARAMETERS AT STC

Module Type	HS585-MHG	HS590-MHG	HS595-MHG	HS600-MHG
Power	585W	590W	595W	600W
Open Circuit Voltage	40.90V	41.10V	41.30V	41.50V
Short Circuit Current	18.37A	18.42A	18.47A	18.52A
Maximum Power Voltage	33.80V	34.00V	34.20V	34.40V
Maximum Power Current	17.31A	17.35A	17.40A	17.44A
Module Efficiency	20.65%	20.85%	21.02%	21.20%

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL PARAMETERS AT NMOT

Power	447W	451W	455W	459W
Open Circuit Voltage	37.95V	38.14V	38.33V	38.51V
Short Circuit Current	15.06A	15.10A	15.15A	15.19A
Maximum Power Voltage	31.33V	31.52V	31.70V	31.89V
Maximum Power Current	14.27A	14.32A	14.36A	14.39A
Module Efficiency	15.78%	15.94%	16.08%	16.22%

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.


## TEMPERATURE CHARACTERISTICS

NMOT	45±2°C	Temp Coefficient of ISC	+0.05%/°C
Temp Coefficient of VOC	-0.28%/°C	Temp Coefficient of Pmax	-0.34%/°C

## PACKING CONFIGURATION

Modules/Pallet	31 Pieces	Modules/40' Container	558 Pieces
Packaging Description	18 Pallets, Total=(31+31)x9=558 Pieces		

## IV CHARACTERISTICS

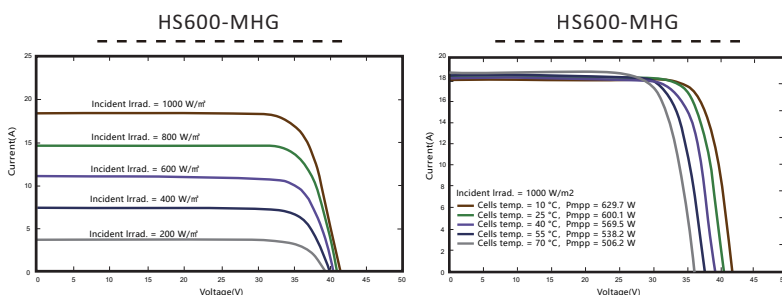

## MAXIMUM RATING

Power selection	0~+5W
Measuring uncertainty of P <sub>m</sub>	0~±3%
Operating Temperature	-40°C~+85°C
Wind Load/Snow Load	2400pa/5400pa
Fuse Current	30A



Quality  
Warranty



Power  
Warranty

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

©2023 Horay Solar Co.,Ltd. All rights reserved. Specifications included in this datasheet are subject to change without notice.

Version number: MHO\_EN\_2023\_A